

megamount 603/603 Racing SUPER-AUTOMATIC



"The benchmark for the busy tyre shop; unbelievably strong and versatile."

Designed to handle the toughest low profile/alloy rim combinations and run flat tyres without any stress to the operator or the machine.

MAIN FEATURES

- Pneumatic forward/back swinging mounting arm.
- Pneumatic up and down movement of the operating arm.
- Clamping range 10-26 inches (28 with extender - option)
- Inflating pressure limiting device.
- Smart blade bead breaker, also for the stiffest tyres.
- Stroke limiter and Auto Return
- Mounting column with 41mm diameter.
- Megafit 2 - all functions combined in one arm.(Racing)
- Double speed turntable with pedal switch.
- Toolbox. (Racing)



Designed, manufactured and assembled in ITALY



PlusTwo Turntable

Our patented PlusTwo Adjustable turntable means that the clamping can be set to 10" to 24" or 12" to 26" without the need for individual adjustment of each clamp. As option an extension from 2" is available.




Auto Return

The 'Auto Return' function automatically pushes the bead breaker blade back out after the bead breaking procedure. This eliminates the problem with the blade getting stuck between the rim and tyre.

Optimized Pedals

Bead breaker operation pedal is positioned ergonomically nearer to where operator stands



Bead Breaker Stroke Limiter

Smart blade can be adjusted to standard or run-flat settings. Pressing the button the arm can be moved to the required starting position. Upon releasing the button the blade will not only remain in that position, but also return to the "home" position after each breaking motion. With our bead breaker stroke limiter, the distance that the blade is required to travel can be adjusted in order to limit the distance to that required in order to break the bead, and prevent any further unnecessary and potentially damaging travel to occur.

megamount 603/603 Racing SUPER-AUTOMATIC

Standard Features and Optional Accessories

Standard Features coming with the machine:

- Water separator/oiler with manometer
- Grease pot holder
- Tyre lever
- 10 bar operating pressure limiting device
- CE 3,5 bar inflating pressure limiting device
- Plastic protection package

Optional Accessories



JetBlast

This device helps seat the bead of stubborn sidewalls when inflating. Fully integrated in the machine. Replaces the GT device.

Wheel Lifter

Can be fitted to either 603 or 703 models, and enables the operator to easily raise the wheel up to the turntable by means of a foot-operated pedal device




QX-System

Forget the lever! Pneumatic supported mounting/dismounting tool for fast and safe working. To convert a standard machine into 'lever-less' operation. (tilt arm models only).



Color Options

WDK-KIT
to provide full WDK compatibility.

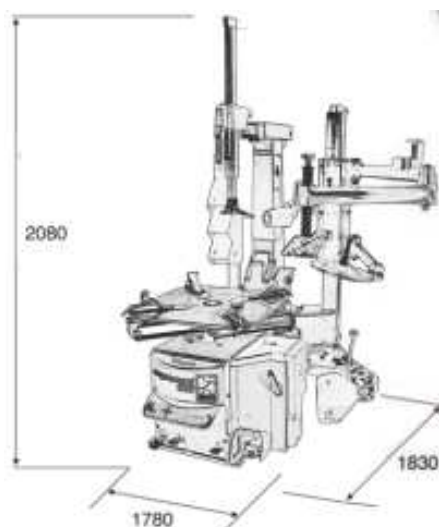

TECHNICAL DATA	
Air pressure	8 to 12bar
Three phase Motor	230-400V /50Hz /550W
Motor single phase (Option)	220V / 50Hz /750W
Self-centring lock external	10"-24"
Self-centring lock internal	12"-26" (with extender 28 -Option)
Maximal wheel diameter	1000mm
Maximal rim width	15"
Bead breaker pressure	2500kg (single sided)
Dim.(WxDxH) 603/603+Megafit2	114x114x107/ 114x138x186
Weight (packed) 603/603+Megafit2	295kg / 425 kg