

megamount TWISTER SUPER-AUTOMATIC

The most solid and compact automatic side-up design in the market to handle the toughest low profile/alloy rim combinations and run flat tyres with UniClamp® patented turntable, and electric bead breaker.



MAIN FEATURES

- TwistUp® Pneumatic side up-turning mounting arm
- UniClamp® system with single flange
- Clamping range 10"-26" inches *
- Balanced force on self lubricating rollers clamps
- EBB® Electric bead breaker
- Multi speed moto inverter turntable with pedal control
- Smart Beam® Self centring long run mounting beam
- Spider Assist 2® - two strong arms for independent work
- Reversible rubber pad

MADE IN EU Designed, and manufactured in ITALY
5 Patents pending®



Shown with optional Spider Assist 2 press system



UniClamp®

This unique and patented ultra strong turntable design incorporates the patented UniClamp® system with guides that are moving on self lubricated rollers, with single flange, providing a balanced, and straight 12" to 26" clamping range without adjustment.

3 Years Warranty on the UniClamp® system.



EBB® - Electric Bead Breaker

The EEB motor inverter powered system, allows to control with millimetric precision the bead breaking phase, avoiding unnecessary movement of the blade forth-backward. Finger operated multi pressure switches. Smooth and noiseless operations. This eliminates the problem with the blade getting stuck between the rim and tyre.



QTC® - Quick Tool Change

To enable fast, tool-free interchange between demount heads. Includes standard-low profile, and plastic heads.



Wee-Rollers®

Prevents the wheel from slipping backwards but supports the rolling movement.



Floor Rollers

Solid built floor rollers, enables the operator to easily roll the wheels when bead breaking

megamount TWISTER SUPER-AUTOMATIC

Standard and Optional Accessories

Standard accessories coming with the machine:



- Oiler with manometer
- Grease pot holder
- Tyre lever
- Pedal inflating
- 10 bar operating pressure limiting device
- Air pump for inflating with CE 3,5 bar pressure limiting device
- Plastic protection package

Optional Accessories



Spider Assist 2 ®

This is the space saving patented evolution of similar design, optimal for handling run-flat tyres. Twin assist arms provide twice the handling power. Also enables both arms to operate independently of each other. The innovative Spider-design allows great space saving, and even small tire shop can fit it.



Bead Bazooka

This device helps seat the bead of stubborn sidewalls when inflating. Mobile unit with possibility to be integrated in the machine.




WDK-KIT

to provide full WDK compatibility.

Colour Options

Special colours on demand for minimum quantity

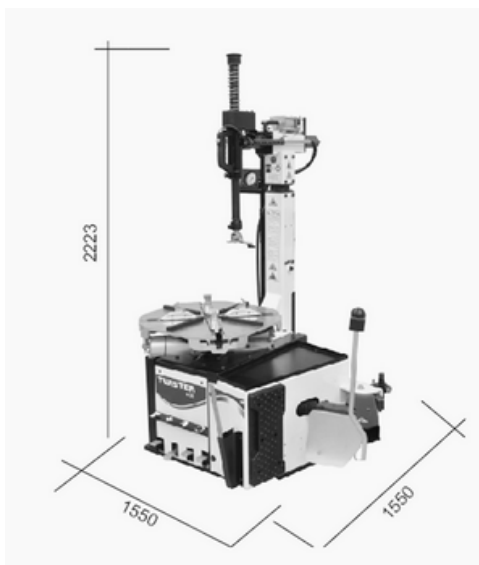

TECHNICAL DATA	
Air pressure	8 to 12bar
Main Motor inverter	230V / 50Hz / 750W
Bead breaker motor	230V / 50Hz / 750W
Self-centring lock	12"-26"
Maximal wheel diameter	1000mm
Maximal rim width	12" (330mm)
Bead breaker pressure	1600kg (electric)
Rotation speed	From 8 to 18 rpm
Dim.(WxDxH) 703 XLE	110x110x210 (cm)
Gross weight (packed)	435kg